



Single Row Type Milking Cow Free Stall , 3mm Thickness Hot Galvanizing Tube

Our Product Introduction

for more products please visit us on mobilemilkingmachine.com

Basic Information

- Place of Origin: China Mainland
- Brand Name: HL
- Certification: ISO
- Model Number: HL-MP09,HL-MP10
- Minimum Order Quantity: 1 Unit
- Price: USD
- Packaging Details: Bulk
- Delivery Time: 7 - 10 days
- Payment Terms: T/T, Western Union, MoneyGram,Paypal
- Supply Ability: 5000 units / month



Product Specification

- Name: Free Stall
- Item: Single Row Type Milking Cow Free Stall
- Type: Single Row Type
- Material: Hot Galvanizing Tube
- Thickness: 3mm
- Model: HL-MP10
- Highlight: cow milking stall, dairy free stalls



More Images



Product Description

Single Row Type Milking Cow Free Stall , 3mm Thickness Hot Galvanizing Tube

Quick Details:

- Item: single row type milking cow free stall
- Type: single row type
- Steep pipe diameter: 61mmx55mm
- Steel pipe thickness: 3mm
- Main Parts: stall, neck rail, chest rail, clamp, screw/bolt etc.

Description:

The single row type milking cow free stall is another necessary farm equipment for the free stall barn / shed, plays the same role with the head lock in the dairy farm. Usually, the single row type milking cow free stall with galvanized headlock and cow rubber mat used in combination.

The hot galvanizing single row type milking cow free stall is custom tailored according to the animal body shape, could provide the rest place for animal. the most important function for the single row type milking cow free stall is to make sure animals have a good sleeping. Good single row type milking cow free stall will make animals have less disease, mastitis, nipple damage.

The stall is made with hot dipped galvanized steel pipe, the pipe outer diameter is 61mm, the pipe thickness = 3mm, and with 0.2mm galvanizing layer. Single row type milking cow free stall and double row type milking cow free stall for choosing. Both two types milking cow free stall are suitable for dry cow, pregnancy cow, lactating cow, young cow, growing cow, heifer, weaning cow.

Features:

1. The single row type milking cow free stall be made of galvanized pipe: anti-corrosion, acid proof and durable;
2. The single row type milking cow free stall is durability, due to the suspended construction;
3. The single row type milking cow free stall shoulder rail height 120 cm, therefore plenty of room for getting up and laying down;
4. The single row type milking cow free stall independent and clean: improve the animal sleep quality & milk production
5. The single row type milking cow free stall has unique and cow-friendly design: avoid in bruising when animal stands up or rest, and ensure the animal safety, also freedom when resting due to the special design;
6. The single row type milking cow free stall is easy to clean and install, meadow mattress can be placed without any problem ;
7. The single row type milking cow free stall is cold bending forming, be linked by bolted, overall without welding, strong and durable pipe, it is not easy to rust and distort;
8. The single row type milking cow free stall specification flexible: completely according to the animals age and shape design the length and width, adjustable in height and width, convenient to lie-down, and easy entry and exit easy.

Specification:

Item	R-Shape Single Row Type	R-Shape Double Row Type
Component	stall, neck rail, chest rail, clamp, screw/bolt.	
Animal Range	dry cow, lactating cow, young cow, growing cow, heifer, weaning cow.	
Material	3mm hot dip galvanized pipe(Dia:61mmx55mm)	
Cattle Spacing	(1.00m-1.20m)/cow	(1.00m-1.20m)/cow
Length(m)	2.00	4.00
Width(m)	1.00-1.20	1.00-1.20
Height(m)	1.0-1.35	1.0-1.35
Note: Free stall size(L,W,H) is customizable.		

Application:

The single row type milking cow free stall usually be installed into the free stall barn, and the function of the free stall is providing the rest place for animal and regulating the resting position, making sure animals have a good sleeping and less disease, mastitis, nipple damage.




Nancy Zhang

Skype: nancy.zhang62

Viber/WhatsApp:0086 13301569240

Email: sales2@dairymachinery.cc

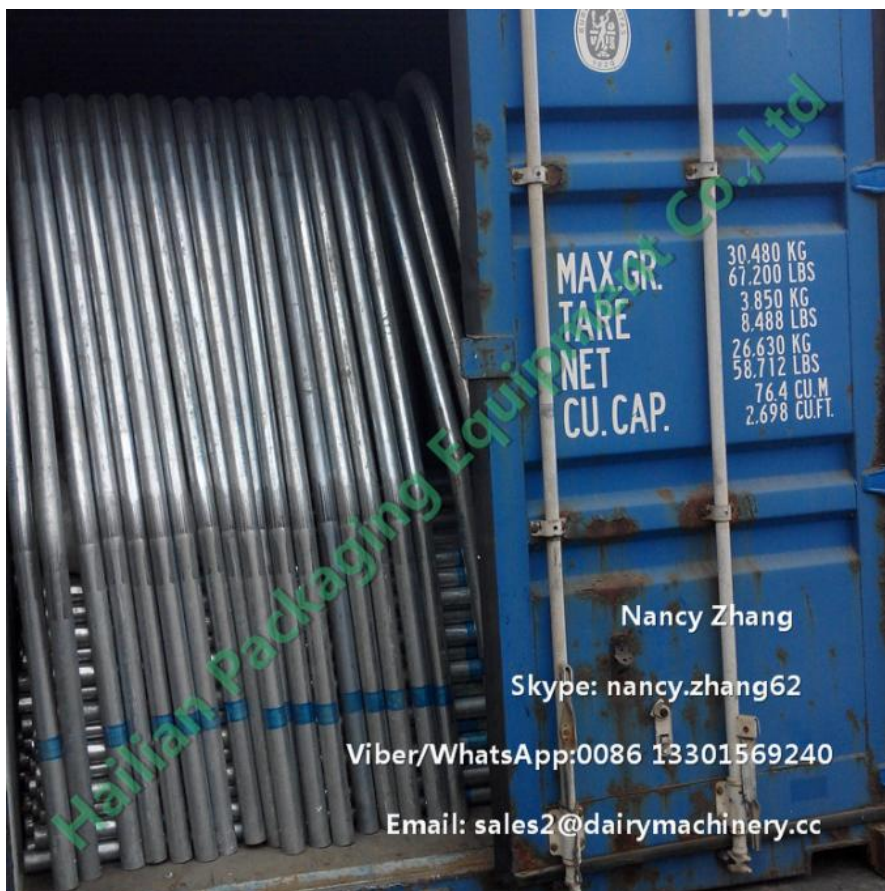

MAX.GR.	30.480 KG
TARE	67.200 LBS
NET	3.850 KG
CU. CAP.	8.488 LBS
	26.630 KG
	58.712 LBS
	76.4 CU.M
	2.698 CU.FT.

Nancy Zhang

Skype: nancy.zhang62

Viber/WhatsApp:0086 13301569240

Email: sales2@dairymachinery.cc

Contact Us

Contact Name: Ms. Nancy Zhang

Wechat:

Telephone: +86 133 0156 9240

Skype: nancy.zhang62

Web: <http://www.dairymachinery.cc>


<http://www.mobilemilkingmachine.com>

WhatsApp / Viber: 008613301569240



Chuangpu Animal Husbandry Technology (Suzhou) Co., Ltd.

 0086 13301569240

 sales2@dairymachinery.cc

 [mobilemilkingmachine.com](http://www.mobilemilkingmachine.com)

Nanzhuang Village, Economic Development Zone, Yangshe Twon, Zhangjiagang City, China